



CABUCHON®

BATH *forms*

OCTAVIA INSET BATH

This bath is supplied with only waste & overflow holes drilled in order to allow options on jobsite in the positioning of spouts, taps, handshowers and whirlpool controls. The only rule is good plumbing.


The bath is mounted on four metal legs with adjustable feet with the minimum and maximum height as shown below. The weight of the bath must rest on its feet. Do not support the weight of the bath by its rim on a deck.

All Cabuchon products are registered designs covered by copyright and the Company, being committed to continuous innovation and improvement, reserves the right to change specifications without notice. Tolerances are +3 or - 3 mm.

NORMAL WATER REQUIREMENT

373 Litres, 82 Imperial Gallons, 98 US Gallons

KEY TO SIZES: ■ Millimetres □ Inches to nearest 1/4"

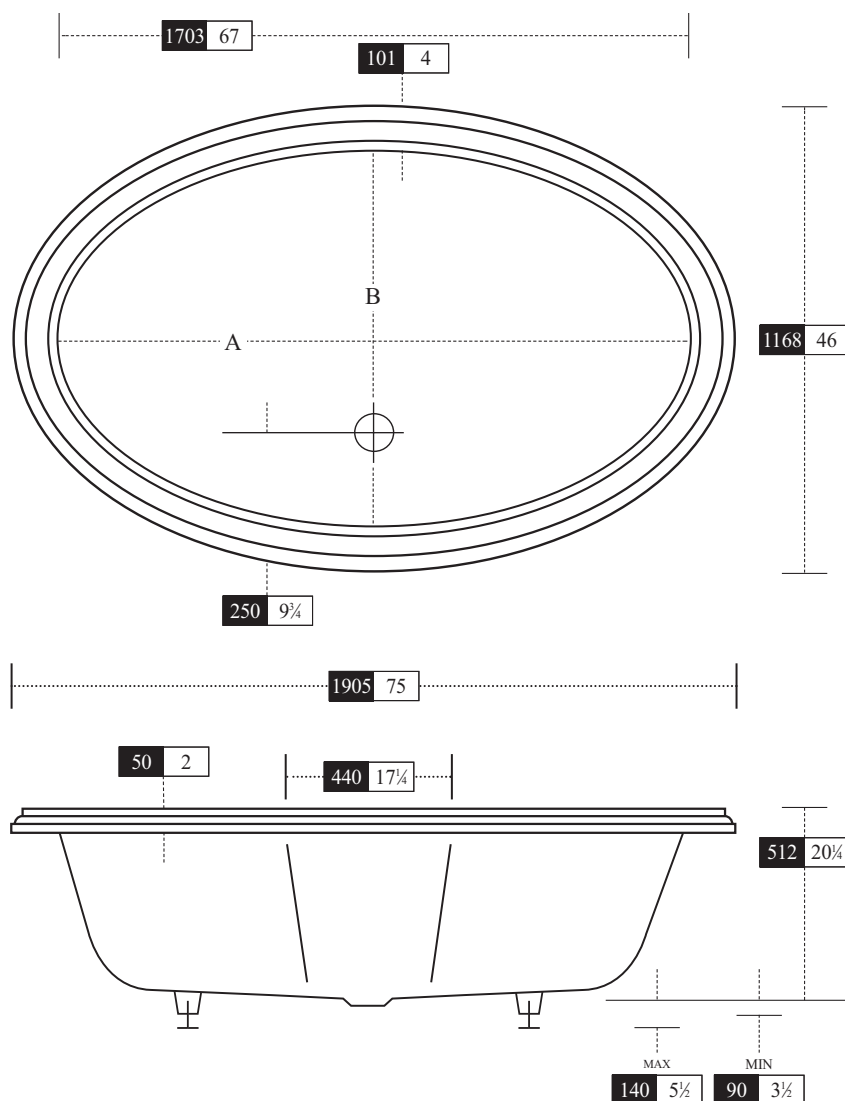

	A	B
Top	1560 61½	860 33¾
Bottom	1210 47¾	740 29¾