



CABUCHON®

BATH *forms*

PALLADIAN INSET BATH

This bath is supplied with only waste & overflow holes drilled in order to allow options on jobsite in the positioning of spouts, taps, handshowers & whirlpool controls. The only rule is good plumbing.


The integral steel chassis has four screw-adjustable feet allowing a variation in height of 80mm/3¼". Maximum height of feet is 140mm/5½". Do not support the weight of the bath by its rim on a deck.

All Cabuchon products are registered designs covered by copyright and the Company, being committed to continuous innovation and improvement, reserves the right to change specifications without notice. Tolerances are + or - 3 mm.

NORMAL WATER REQUIREMENT

216 Litres (48 Imperial Gallons)

KEY TO SIZES: ■ Millimetres □ Inches to nearest ¼"

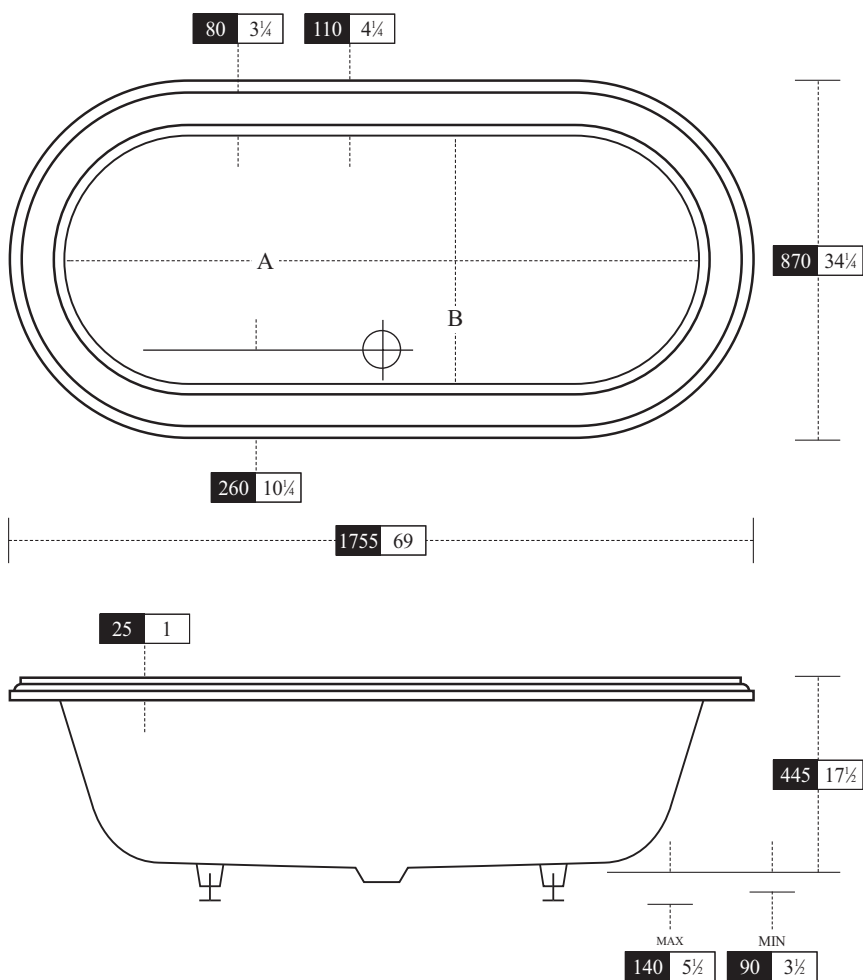

	A	B
Top	1530 60¼"	650 25½"
Bottom	1210 47¼"	500 19¼"