


HPN1 – Specification Details



Project Information

Name: _____
 Location: _____
 Contact: _____
 Phone: _____
 Email: _____

Colour:

Example:
T: Standard
R: Standard

Example:
T: PLUS
R: Standard

Example:
T: ECOGLO
R: Standard

Example:
T: PLUS
R: PLUS

Example:
T: ECOGLO
R: ECOGLO

Tread

Riser

6

11

15

26

49

64

81

77

51

21

10

10

11

11

16

52

53

30

11

6

13

33

56

67

5

27

41

22

9

147

5

49

69

Black

Granite

Flint

Light Grey

Polar Grey

Mist

White

Desert

Ivory

Fawn

Rustic

Peat

Dark Blue

Regency

Royal Blue

Sky

Lime

Jade

Spruce

Claret

Poppy

Tangerine

Sun

Yellow

Carbon

Platinum

Sand

Aqua

Ruby

Hornet

Black

Yellow

Photoluminescent

Standard – Slip Resistant PVC

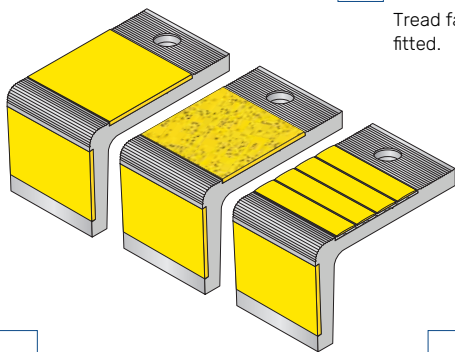
PLUS-TREAD

ECOGLO

Drilling / Fitting Option:

☐

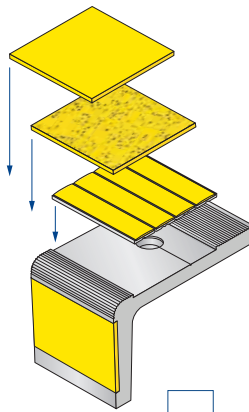
Option A
Not drilled.
Tread factory fitted.


☐

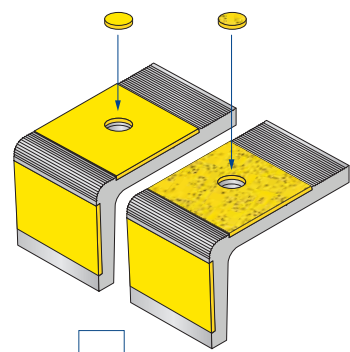
Option B
Suitable for all 3 tread types.
Pre-drilled through serrated back edge with factory fitted tread (recommended),

☐

Option C.1
For Standard, PLUS TREAD.
Pre-drilled in channel with with double sided tape prefitted, tread provided separately to be added after fixing.


☐

Option C.2
Only for Ecoglo.
Pre-drilled in channel, Ecoglo tread provided separately to be added after fixing with Q-Fix.


☐

Option D
Only for Standard, PLUS TREAD.
Pre-drilled in channel with factory fitted tread and separate provided plugs to cover drill holes.

Length:

Amount of lengths: _____

Drill holes starting 75 mm from each end, then equally spaced

Length	No. of holes
600 – 999 mm	3 holes equally spaced
1,000 – 1,499 mm	4 holes equally spaced
1,500 – 1,999 mm	5 holes equally spaced
2,000 – 2,749 mm	7 holes equally spaced
2,750 – 3,500 mm	9 holes equally spaced