



FLEXIBLE STAIR NOSINGS



This selection of flexible PVC profiles can be used when a quick and/or temporary fitting of a Stair Nosing is required. They are supplied pre-boxed and are easily cut and trimmed on-site where they can be fitted without waiting for fully measured and drilled Stair Nosings.

FEATURES & BENEFITS

Well fitted Stair Nosings make stairs safe, durable and attractive.

- Same colour tread and riser – Building Regulations 'best practice' solution.
- 55 x 55 mm stair nosing available for all floorcovering heights.
- Trimmed on-site – quick and easy installation for temporary or light trafficked applications.
- Good value – low-cost option.
- Different gauges – for use with any floorcovering type.
- Profiles for all step nose shapes – correct shape for safe installations.
- Rake back profiles also fit flat steps.
- Pre-packed in boxes – 2.44 m lengths for on-site trimming.
- Easily installed with adhesive and no screws – saves time on-site.
- Easy to clean – low maintenance.
- Can be curved around gentle radii without templating.



SUPPORT & TECHNICAL ADVICE

Call +44 (0) 161 627 4222 or visit
quantumflooring.co.uk



Express sample requests.



Product selection advice.



Best practice fitting guidelines.



Product drawings & datasheets.

FLEXIBLE STAIR NOSINGS

MATERIAL

Slip Resistant Polyvinyl Chloride (PVC)


COLOURS

LRV


Black	6
Claret	6
Peat	10
Rustic	10
Dark Blue	11
Granite	11
Regency	11
Spruce	11
Poppy	13
Flint	15
Royal Blue	16
Fawn	21
Light Grey	26
Jade	30
Tangerine	33
Polar Grey	49
Ivory	51
Sky	52
Lime	53
Sun	56
Mist	64
Yellow	67
Desert	77
White	81

FLAT FRONT (90°), RAKE BACK (83°) & BULL NOSE STEPS



SURFACE MOUNTED/DIRECT TO STEP STAIR NOSINGS

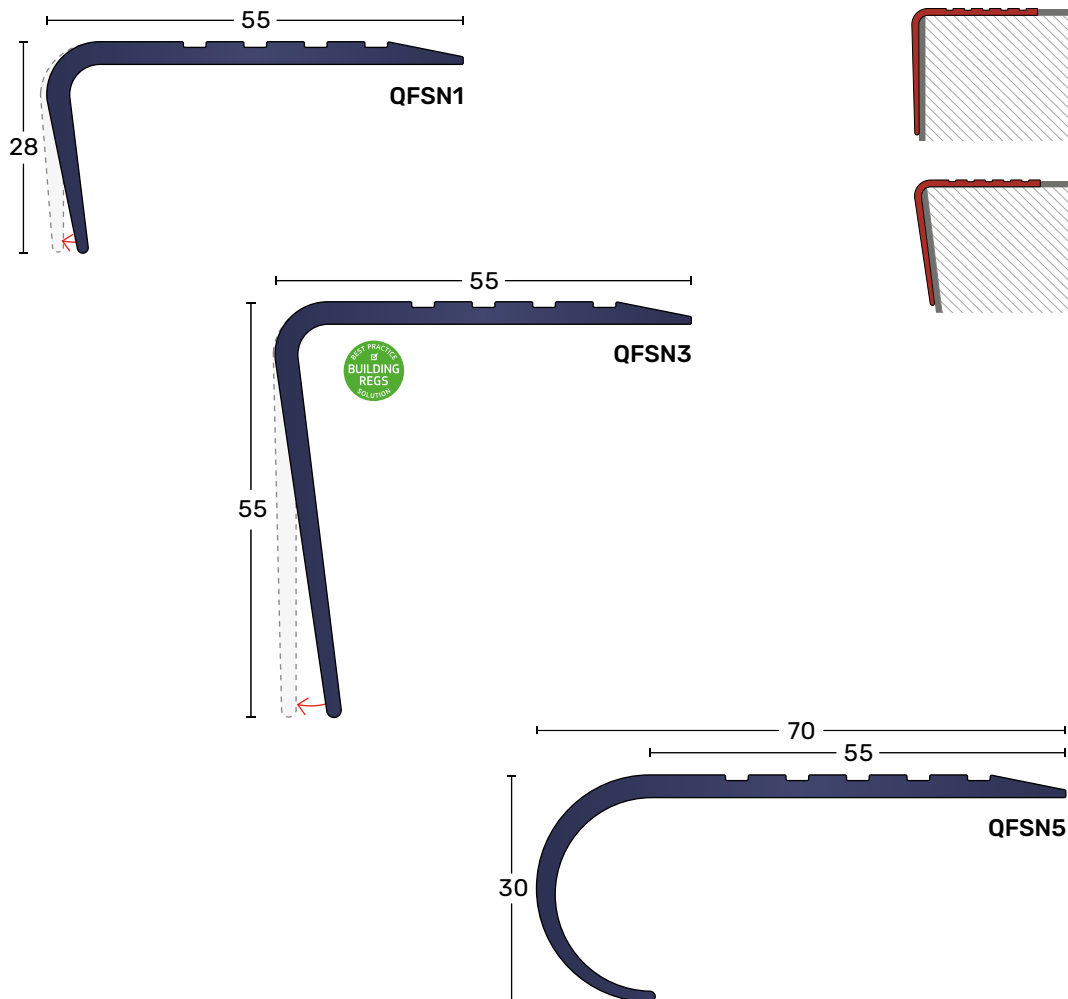

RESILIENT FLOORING (2–3.5 mm) STAIR NOSINGS

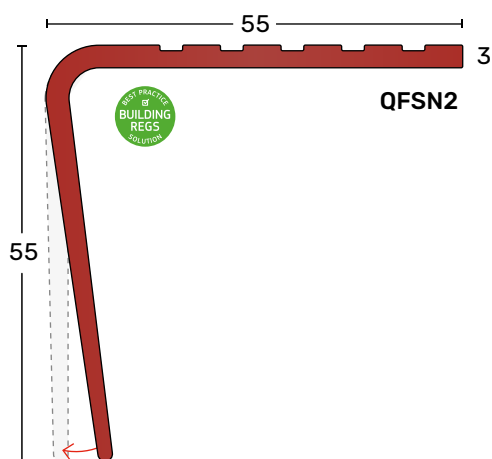

CARPET & CARPET TILE FLOORING (4–9 mm) STAIR NOSINGS

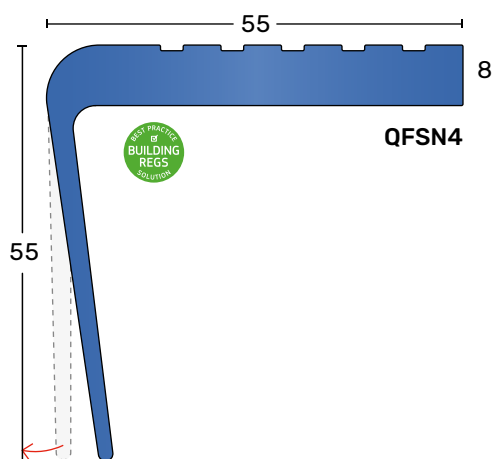

2D product images are to scale with dimensions in mm. Colours shown are for guide purposes only and are as accurate as the printing process allows. Always request a sample for exact colour match by emailing samples@quantumflooring.co.uk. Products subject to minor design alterations from time to time.



TECHNICAL DATA

PRODUCT COMPOSITION

Polyvinylchloride (PVC)

Plasticisers

Inert fillers

Flame retardants

PHYSICAL AND CHEMICAL PROPERTIES

Form: flexible

Colour: various

Odour: slight odour

Solubility: insoluble in water

Decomposition: will decompose at temperatures above 150°C

SAFETY DATA

Please review 'Safety Data Sheet - Stair Nosings' on quantumflooring.co.uk.

SLIP RESISTANCE

Treads tested independently by Grip Potential Ltd. Using the pendulum test (BS7976-2 Test Certificate) adhering to UKSRG, HSE and CIRIA guidelines on pedestrian slip risk assessment.

These tests confirm that all QPSL treads exceed the minimum requirement as per BS8300-2:2018 and HSE Publications.

MAINTENANCE

1. Clean with a mild detergent solution. Make sure all cleaning solutions are removed.

Do not use solvents!

2. Dry off if necessary with lint free cloth.

Do not open to traffic whilst wet!

ALLIED PRODUCTS

UTA STAIR ANGLES -

View UTA on the Quantum Flooring website

UTP STAIR ANGLES -

View UTP on the Quantum Flooring website

INSTALLATION

Q-FIX ADHESIVE

1. When on-site, trim Stair Nosings to size as required. Ensure that the step is sound, clean, and free of contaminants and loose materials
2. Apply Q-FIX adhesive to the underside of the profile in a 5 mm wide bead beginning 5 mm in from the outer edge of the profile. Apply the next 5 mm bead of adhesive approx. down the middle of the profile.
3. Turn the nosing over and place the leading edge slightly over the edge of the step. Simultaneously slide the nosing down and in to position so that the adhesive is distributed from front to back as it goes into place.
4. Allow 1 hour after fixing before opening the area to traffic. It is the contractor's responsibility to check the bond is secure before opening the area to traffic.

CURVING

Flexible pvc stair nosings can be curved on-site around gentle radii without templating.

(NOTE: This is dependent on the tightness of the curve, please call +44 (0) 161 627 4222 for more info.).

PACKING SPEC

2.44 m lengths.

QFSN1, QFSN3, QFSN5 packed 15 lengths per box.

QFSN2 & QFSN4 packed 10 per box.

Longer lengths available on request.

