

TVS Cleancare Smooth v2

TECHNICAL INFORMATION




TVS Cleancare Smooth is now has a completely smooth vinyl face offering 90% RH Moisture Resistance (up to 30°C). It can be completely recycled and incorporates an aluminium-coloured sheet on the rear of the tile; this works as a vapour barrier and helps protect the tile from leaks in the ceiling void at the same time.

A simple low-cost solution for retail and kitchen environments, providing a cleanable tile with good light reflectance. Packaged in boxes for easy transportation around site.

Technical Data

Edge:	Square
Dimensions:	White: 600 x 600mm / 1200 x 600mm
Thickness:	8.00mm (+/- 0.5mm)
Average Weight:	5.80kg/m ²
Units/Box:	8 tiles (600 x 600mm) = 2.88m ² weight: 17kg per carton 6 tiles (1200 x 600mm) = 4.32m ² weight: 26kg per carton
Thermal Conductivity:	0.25 W/m K (UNE-EN 12524 Standard)
Moisture Resistance:	90% RH to 30°C
Fire Rating:	Euroclass B-s1,d0
Intended Use:	Removable ceilings in retail spaces, bathrooms, kitchens and areas where easy maintenance and cleaning are required.

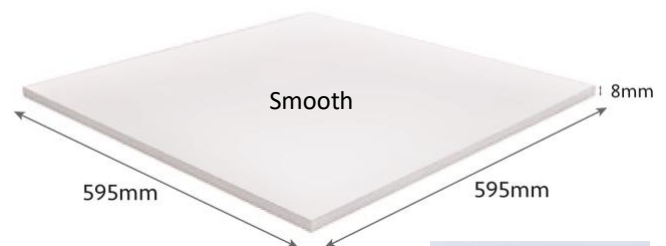

Advantages

- Smooth vinyl face
- Easy to clean
- High light reflectance
- Vapour barrier to rear of tile
- Moisture resistance
- Recyclable
- Durability
- Euroclass fire rating



Product: TVS CLEANCARE SMOOTH V2
Revision: 1.3 **Issued:** 10/2025

T: +44 (0) 1706 260 220 | F: +44 (0) 1706 260 240
E: Sales@TVS-Group.co.uk | W: www.TVS-Group.co.uk
Low Bay | Commerce Street | Carrs Industrial Estate
Haslingden | Rossendale | Lancashire | BB4 5JT | United Kingdom

